

Thor H.265/H.264 Video Decoders Manual

1U Rack-mounted H.265 4K HDMI VGA SDI/CVBS Video decoder - DecodePro 4K



H265 4K HDMI SDI VGA CVBS Video Decoder- IP-HDMI-SDI-4K-D



Index

1. Environment Settings	3
1.1. Hardware Interface	3
1.1.1 Front Side view	3
1.1.2 Back Side view	3
2. Management Settings	4
2.1 Login	4
2.2 Address setting - Input Streaming URL	4
2.3 System setting	5
2.3.1 System output	5
2.3.2 Network Setting	6
2.3.3 Password Setting	6
2.3.4 System Upgrade & Backup	7
2.3.5 Reset device	7
2.3.6 Reboot Device	8
2.4 Status	8
2.4.1 System Status	8
3. FAQ	9
3.1 How to reset the decoder?	9
3.2 I can't enter into the decoder control panel or ping it?	9
3.3 I can't watch the video on TV/Display.	9

1. Environment Settings

1.1. Hardware Interface

1.1.1 Front Side view



From Right to Left:

- ① DC5-12V: 5V 2A or 12V 1A
- ② Ethernet: 1000 Mbit/s full-duplex
- ③ HDMI Output
- ④ VGA Output
- ⑤ SDI Output
- ⑥ Analog 3.5mm jack Audio Output
- ⑦ RST: Reset button

1.1.2 Back Side view



- ① P-Power indicator
- ② E- Ether Network
- ③ V-Video Output
- ④ CVBS output

2. Management Settings

2.1 Login

By <http://192.168.1.169> (default IP) to login the decoder, default user name and password are **admin**.

2.2 Address setting - Input Streaming URL

Max can input 4 streaming address, and output 4 video windows in 1 display

Tips, below 'username' is authentication username, 'password' is authentication password. Do not fill in 'username:password@' if no authentication required.

Decoder as client mode - pull stream from other devices / media streaming server,

<http://username:password@192.168.1.168/0.ts>

<http://username:password@192.168.1.168/0.flv>

<http://username:password@192.168.1.168/0.m3u8>

<rtsp://username:password@192.168.1.168/0> [RTSP OVER TCP]

<rtsp://username:password@192.168.1.168/0?udp> [RTSP OVER UDP]

[rtmp\(s\)://username:password@192.168.1.168/live/0](rtmp(s)://username:password@192.168.1.168/live/0)

<udp://username:password@238.0.0.1:1234>

..... etc.

Decoder as rtmp server, other device/software push rtmp to decoder,

device/software push rtmp to decoder url: <rtmp://decoder ip:port/live/stream name> i.e.

<rtmp://192.168.1.169:1935/live/test> here, the application name must be 'live', you may not need to fill in the rtmp port if server rtmp port is 1935 as default.

Decoder play url: <rtmp://127.0.0.1/live/test> or <rtmp://192.168.1.169:1935/live/test>

For SRT

Decoder as Listener mode

<srt://:port?mode=listener&smoother=live>

<srt://decoder ip:9000?mode=listener&smoother=live>

i.e., <srt://0.0.0.0:9000?mode=listener&smoother=live>

or <srt://:9000?mode=listener&smoother=live>

or <srt://@:9000?mode=listener&smoother=live>

SRT - Caller mode

<srt://encoder ip:port?smoother=live>

i.e., <srt://192.168.1.168:9000?smoother=live>

2.3 System setting

2.3.1 System output

4K Decoder H.265/H.264

Status

Address setting

Advance setting

System setting

Network setting

Serial to TCP

Passwd setting

System output

Factory setting

Upgrade & Backup

Reset device

Reboot device

Schedule Restart

System output

Play mode: Real time

Decode mode: Frame

HD output: 1080P60

HDMI color: 576P50

CVBS output: 720P50

CVBS show X : 720P60

CVBS show Y : 1080P25

CVBS show W : 1080P30

CVBS show H : 1080I50

Rotate : 0 degree

Scaling: Disable

Brightness: 50

Contrast: 50

Hue: 50

Saturation: 50

Volume: 100

Apply

2.3.2 Network Setting

Settle the decoder IP address according with your router; please reboot the decoder once settled.

Status

Address setting

Advance setting

System setting

Network setting ◀

Serial to TCP

Passwd setting

Network setting

Internet access

DHCP: Disable ▼

IP: 192.168.1.169

Mask: 255.255.255.0

Gateway: 192.168.1.1

MAC: 00:13:14:02:2C:78

2.3.3 Password Setting

Change the password – default user name and password are admin.

Status

Address setting

Advance setting

System setting

Network setting

Serial to TCP

Passwd setting ◀

Passwd setting

Old password:

New password:

Confirm new password:

Apply

2.3.4 Firmware Upgrade & Backup

Ensure the Upgrade file name is up.rar. Please don't upload by different people at the same time, don't power off or refresh the page during upload.

Status

Address setting

Advance setting

System setting

Network setting

Serial to TCP

Passwd setting

System output

Factory setting

Upgrade & Backup

Upload firmware and configuration

Version: 1.62.8

Select file:

Scan...

Upload

Warning: File name is up.rar or box.ini. Please dont upload by differe same time, dont power off during upload.

Backup firmware and configuration

Firmware

Configuration

2.3.5 Reset device

After reset the device, all settings will roll back to factory settings.

Status

Address setting

Advance setting

System setting

Network setting

Serial to TCP

Passwd setting

System output

Factory setting

Upgrade & Backup

Reset device

Reboot device

Schedule Restart


Reset device

Reset system:

Reset

2.3.6 Reboot Device


After your settings settled, then click the reboot button to make them effective.

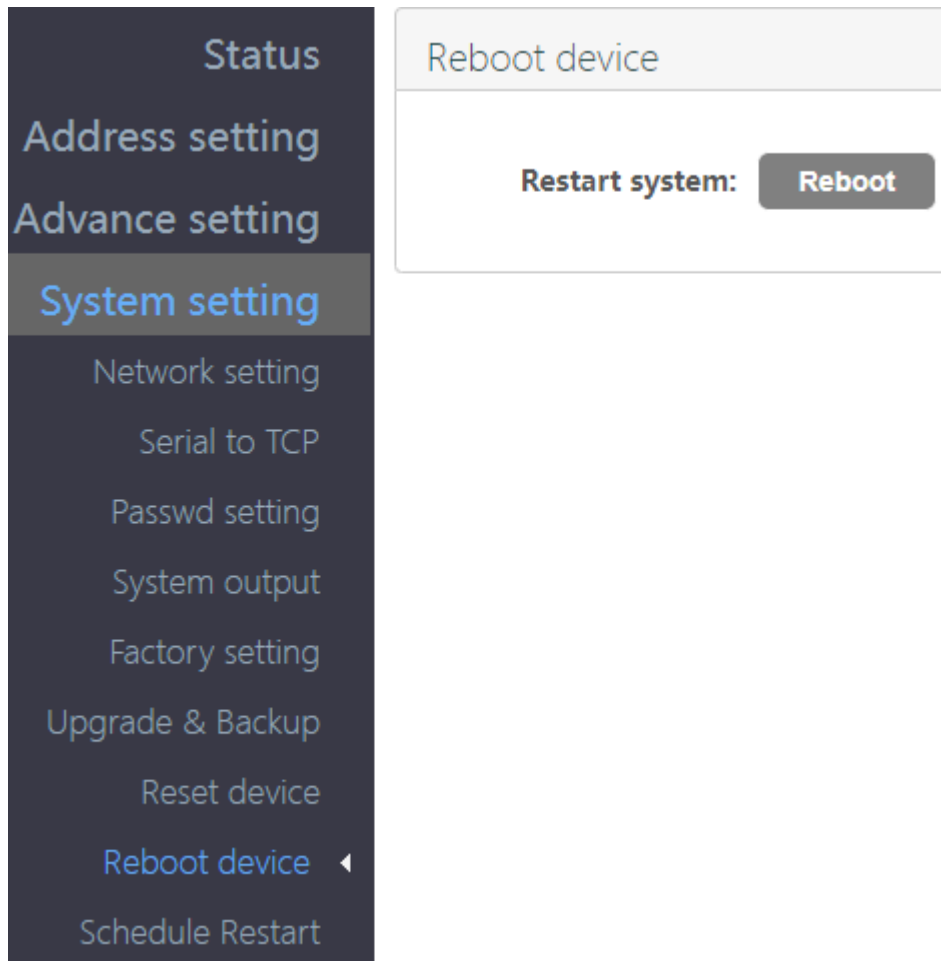

2.4 Status

2.4.1 System Status

After all settings settled, from the status page, you can check each channel output video status, if any error, please ensure the streaming URL is correct.

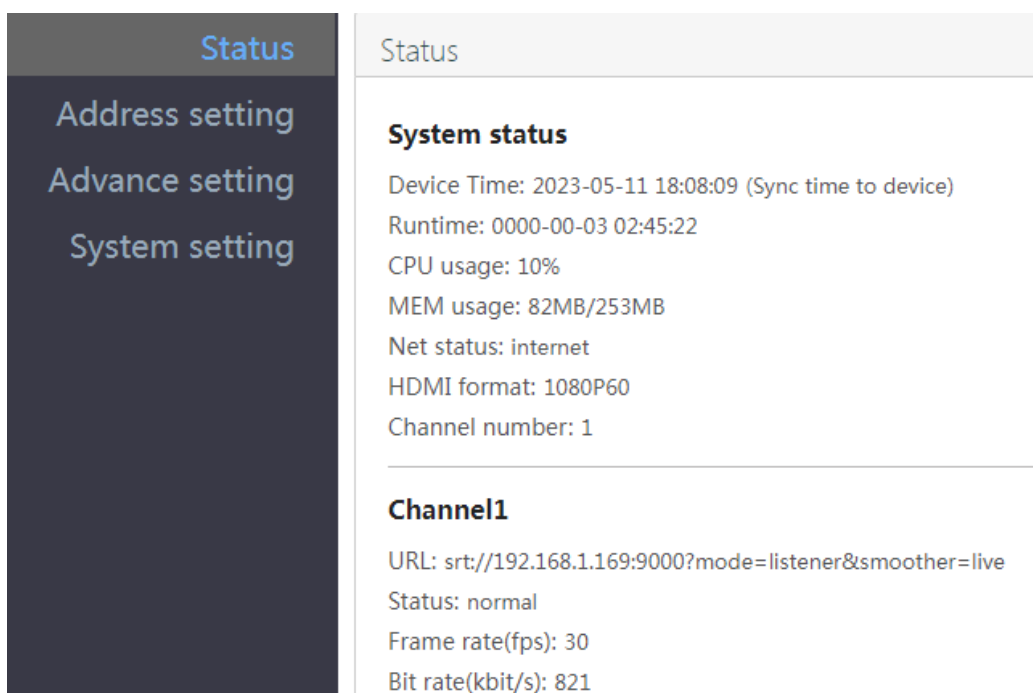


3. FAQ

3.1 How to reset the decoder?

Click the reset menu to reset it or by hardware reset, power on the decoder & hold the RST button around 10 seconds till the status led off, then release it, the decoder will be initialized.

3.2 I login the decoder control panel or ping it.

- 1) Ensure the decoder IP with your router in same gateway, such as Decoder IP is 192.168.1.169, but your router IP is 192.168.0.1 or else, in this situation, you need connect the decoder with your computer directly, and set the computer IP to 192.168.1.106, then login the decoder control panel – System setting – Network setting to set its IP to 192.168.0.169, click Apply, and reboot the decoder.
- 2) Connect the decoder with your router or switch, change back your computer IP.
- 3) If still not works, pls contact us.

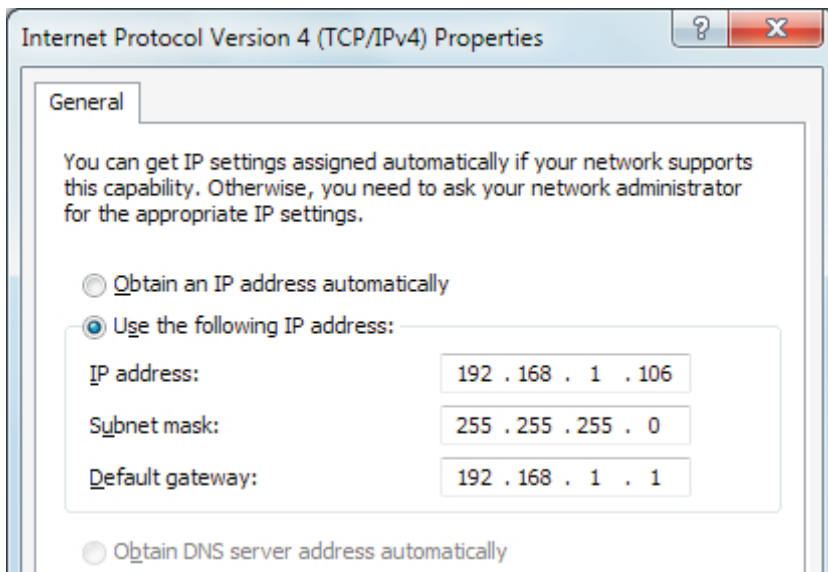

3.3 I can't watch the video on TV/Display.

Please ensure the IP streaming url is correct, and network works.