



THOR BROADCAST

1, 2, 4 Channel SDI to QAM Modulators and IPTV Encoders

H-1SDI-QAM-IPLL | H-2SDI-QAM-IPLL | H-4SDI-QAM-IPLL



Product Family	Professional SDI encoder, QAM RF modulator, ASI transport, and IPTV output in one 1RU rackmount headend chassis.	Input Options	1, 2, or 4 SDI inputs using BNC 75 Ohm connectors. Supports SD-SDI, HD-SDI, and 3G-SDI up to 1080p60.	Output Options	Clear QAM RF over coax, IPTV MPEG-TS over UDP/RTP/RTSP, and ASI input/output for headend integration.
Network Managed	Browser-based NMS management for RF, bitrate, service, PID, and IP streaming configuration.	Low Latency	Low latency modes available for live video applications where standard encoder delay is not acceptable.	Applications	Schools, stadiums, campuses, PEG, houses of worship, government, hotels, and broadcast/AV headends.

Product page: <https://thorbroadcast.com/product/1-4-sdi-to-qam-modulators-and-iptv-streaming-encoders-8230.html>

Model Selection - Choose the Correct SDI Input Count

Model	SDI Input Count	Input Sources	Typical Applications	Use Case
1 Channel SDI-QAM-IPLL	H-1SDI-QAM-IPLL	1 x SD/HD/3G-SDI	Single program SDI feed, camera, switcher, PEG feed, IRD output	Single channel RF/IP insertion or dedicated channel source
2 Channel SDI-QAM-IPLL	H-2SDI-QAM-IPLL	2 x SD/HD/3G-SDI	Two cameras, two program feeds, two SDI sources	Small headend, redundant feeds, two channel venue/campus distribution
4 Channel SDI-QAM-IPLL	H-4SDI-QAM-IPLL	4 x SD/HD/3G-SDI	Multiple cameras, switcher outputs, replay, graphics, IRDs	Multi-channel CATV/QAM RF and IPTV headend in one 1RU chassis

Important: Select the model based on the number of SDI input sources required in the project. All models use the same platform style and output architecture; the SDI input count is the main difference.

Real Rear Panel Views



Front and Rear Panel Views

Shared Front Panel Design



The front panel includes the LCD status display, NMS and DATA Ethernet ports, power/alarm indicators, lock indicators, menu/navigation buttons, and rack-mount ears.

Real Rear Panel Photos - 1, 2, and 4 SDI Versions

H-1SDI-QAM-IPLL | 1 SDI Input | Rear Panel



H-2SDI-QAM-IPLL | 2 SDI Inputs | Rear Panel



H-4SDI-QAM-IPLL | 4 SDI Inputs | Rear Panel



Core Features and Technical Overview

SDI Encoding

Accepts SD-SDI, HD-SDI, and 3G-SDI sources up to 1080p60. The 1, 2, and 4 input versions allow the chassis to match small or multi-source broadcast/AV systems.

QAM RF Output

Outputs digital cable QAM carriers for coax distribution. Supports ITU-T J.83A, J.83B, and J.83C with QAM-64 or QAM-256 operation.

IPTV Streaming

Provides MPEG transport stream output over IP using UDP, RTP, or RTSP. Supports unicast and multicast delivery for LAN IPTV systems.

ASI Integration

Includes ASI input and ASI outputs for multiplexer, IRD, monitoring, and professional headend workflows.

Chassis	1RU professional rackmount encoder/modulator chassis
Models	H-1SDI-QAM-IPLL, H-2SDI-QAM-IPLL, H-4SDI-QAM-IPLL
SDI Inputs	1, 2, or 4 x SD/HD/3G-SDI BNC inputs, 75 Ohm
Input Formats	720p 50/59.94/60, 1080i 50/59.94/60, 1080p 50/59.94/60
Video Encoding	MPEG-2 SD/HD 1.5-19.5 Mbps; H.264 HD 0.8-19.5 Mbps
Audio Encoding	Dolby AC3, MPEG-1 Layer II, MPEG-2 AAC, MPEG-4 AAC
Audio Sample Rate	48 kHz
Audio Bitrates	64, 96, 128, 192, 256, 320 kbps
RF Modulation	QAM J.83A/B/C, QAM-64 / QAM-256
RF Frequency	30-960 MHz, 1 kHz step
RF Level	15-43 dBmV adjustable
IP Output	MPEG-TS over UDP / RTP / RTSP, multicast or unicast
ASI I/O	ASI input up to 120 Mbps; ASI output 1-60 Mbps
Power	100-240 VAC auto switching, approx. 20 W


Headend note: The SDI-QAM-IPLL platform encodes SDI sources and outputs transport streams to RF/IP/ASI. Always verify TV, STB, or decoder support for the selected video codec and audio codec before final deployment.

Accurate SDI to QAM RF + IPTV Application Diagram



H-1/2/4SDI-QAM-IPLL Application Diagram

SDI sources to clear QAM RF, IPTV streaming, NMS management, and ASI transport

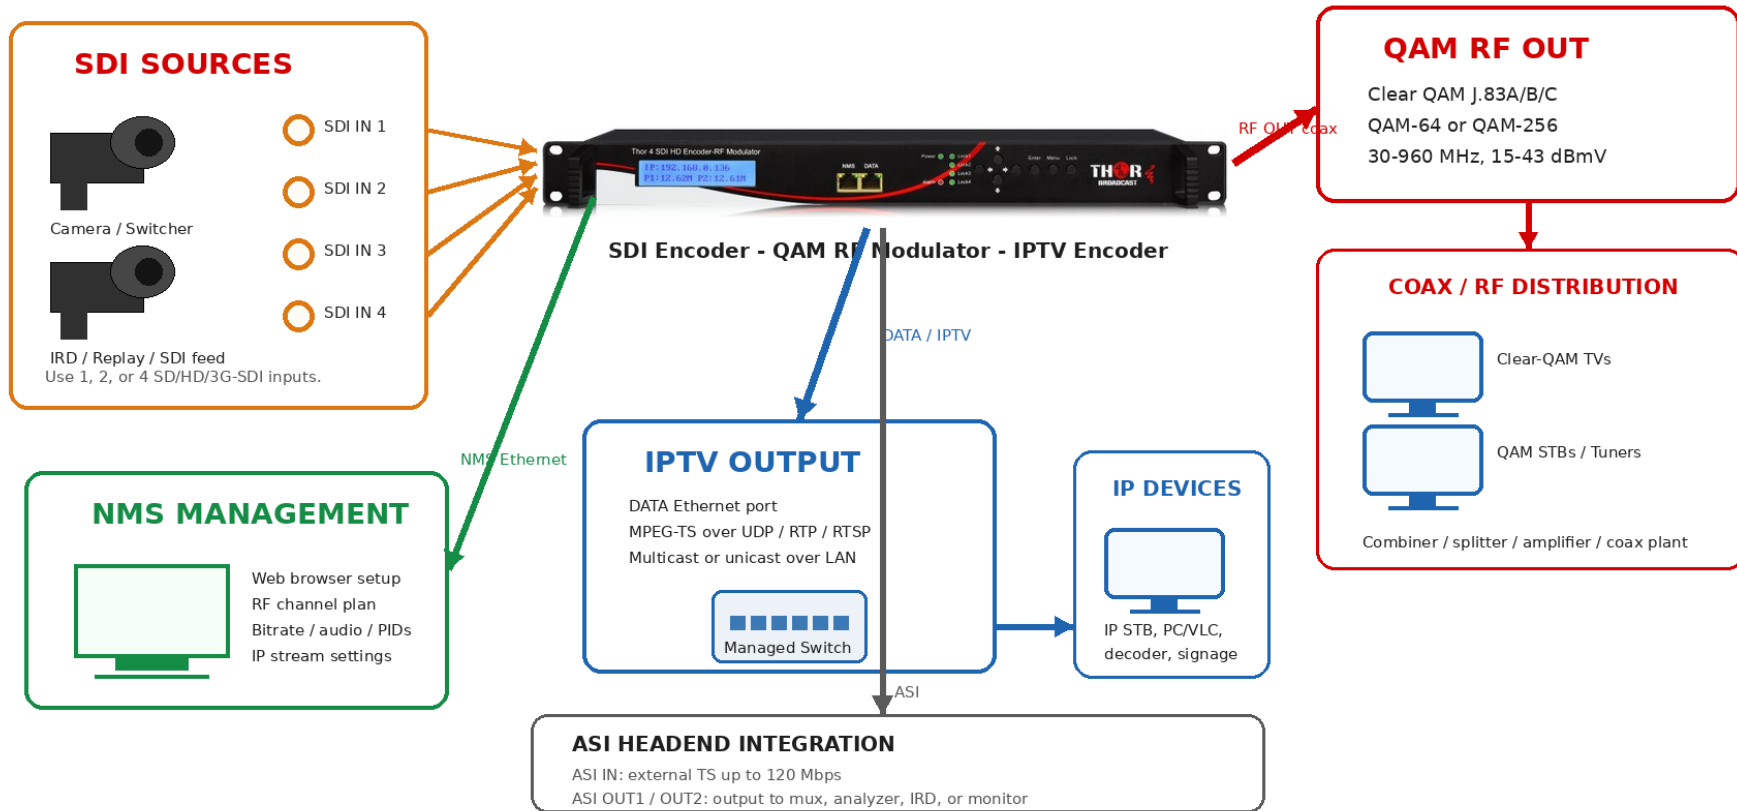

Thor Broadcast | www.thorbroadcast.com | sales@thorfiber.com | 800-521-8467

Signal flow: SDI sources feed the encoder/modulator. RF OUT distributes clear QAM channels over coax. DATA Ethernet provides IPTV transport streams. NMS Ethernet provides browser configuration. ASI ports support professional transport stream integration.

Output Modes and Headend Integration

QAM RF Output	F-type RF OUT / coax	Distribute encoded SDI sources as clear digital cable TV channels over existing coax.	Clear-QAM TVs, coax plant, RF splitters/combiners, CATV amplifiers
RF Input / Loop / Combine	F-type RF IN / RF OUT	Integrate the unit into an RF headend chain or combine with other RF sources when system design requires it.	Existing RF headend, MATV/CATV system
IPTV Streaming	Ethernet, UDP / RTP / RTSP	Stream transport streams over LAN. Use multicast for one-to-many distribution and unicast for point-to-point workflows.	IP STBs, VLC/PCs, decoders, signage players, monitoring systems
ASI Input	BNC ASI IN	Accept external transport streams and mux selected programs by PID into the output system.	ASI encoder, multiplexer, IRD, transport stream source
ASI Outputs	BNC ASI OUT1 / ASI OUT2	Feed transport streams to other professional broadcast or monitoring equipment.	ASI analyzer, multiplexer, IRD, headend gear
NMS Management	Ethernet NMS / web browser	Configure RF channel, modulation, bitrate, audio, service names, PIDs, and IP output parameters.	Laptop/PC on same management network

Multicast note: For IPTV multicast deployments, use managed Ethernet switches with IGMP support to avoid flooding the network. For bench testing, a PC with VLC can verify UDP/RTP streams before final system integration.

Basic Installation and Configuration Checklist

1	Mount and power the chassis	Install in a 19 inch rack with proper ventilation. Connect 100-240 VAC power.
2	Connect SDI sources	Use quality 75 Ohm BNC SDI cables. Confirm each source format is supported and stable.
3	Connect RF output	Connect RF OUT to the coax headend, combiner, test TV, or RF meter. Plan splitter/combiner losses.
4	Connect management network	Connect NMS/DATA Ethernet to a laptop or LAN. Use the web interface for configuration.
5	Set QAM parameters	Select J.83A/B/C, QAM-64/256, RF frequency, RF output level, program numbers, and service names.
6	Set video/audio parameters	Choose MPEG-2 or H.264 and audio codec. For maximum TV compatibility in many US QAM systems, MPEG-2 video with AC3 audio is often preferred.
7	Set IP streaming	Define multicast/unicast IP, port, and protocol. Keep endpoints and source network design on the correct subnet/VLAN.
8	Verify all outputs	Test RF with a TV or meter; test IP with VLC/STB; test ASI with professional headend tools if used.

Quick Troubleshooting

No SDI lock	Verify source resolution/frame rate, SDI cable, BNC connector, and active SDI source output.
TV cannot tune channel	Check QAM standard, frequency, RF level, channel plan, and TV clear-QAM capability.
No audio on TVs	Confirm audio codec compatibility. Many TV tuners prefer AC3 for clear-QAM operation.
IP stream not visible	Check IP address/port/protocol, VLAN/subnet, firewall, and multicast IGMP switch settings.

Ordering Notes and Application Checklist

How many SDI inputs are required?	Determines whether the correct chassis is H-1SDI-QAM-IPLL, H-2SDI-QAM-IPLL, or H-4SDI-QAM-IPLL.
What RF standard and channel plan will be used?	The unit supports QAM J.83A/B/C, but the system must be configured to match the site TV/headend standard and frequency plan.
Will the system use coax, IPTV, ASI, or all outputs?	Impacts RF combining, switch selection, multicast design, monitoring, and headend integration.
How many TVs or endpoints will receive the signal?	Helps size RF amplifiers/splitters and determine whether multicast IPTV should be deployed.
What codecs do the receiving devices support?	TVs, STBs, and IPTV decoders must support the chosen video/audio codec and transport stream format.
Are closed captions or special service names required?	Confirm captioning/service metadata requirements before final configuration.

Thor Broadcast SDI-QAM-IPLL Product Family

A flexible professional encoder/modulator platform for converting 1, 2, or 4 SDI sources into QAM RF cable TV channels, IPTV streams, and ASI transport outputs for modern AV and broadcast distribution systems.

H-1SDI-QAM-IPLL	1 Channel SDI to QAM RF Modulator and IPTV Streaming Encoder
H-2SDI-QAM-IPLL	2 Channel SDI to QAM RF Modulator and IPTV Streaming Encoder
H-4SDI-QAM-IPLL	4 Channel SDI to QAM RF Modulator and IPTV Streaming Encoder



Thor Broadcast / Thor Fiber | www.thorbroadcast.com | sales@thorfiber.com | 800-521-8467