
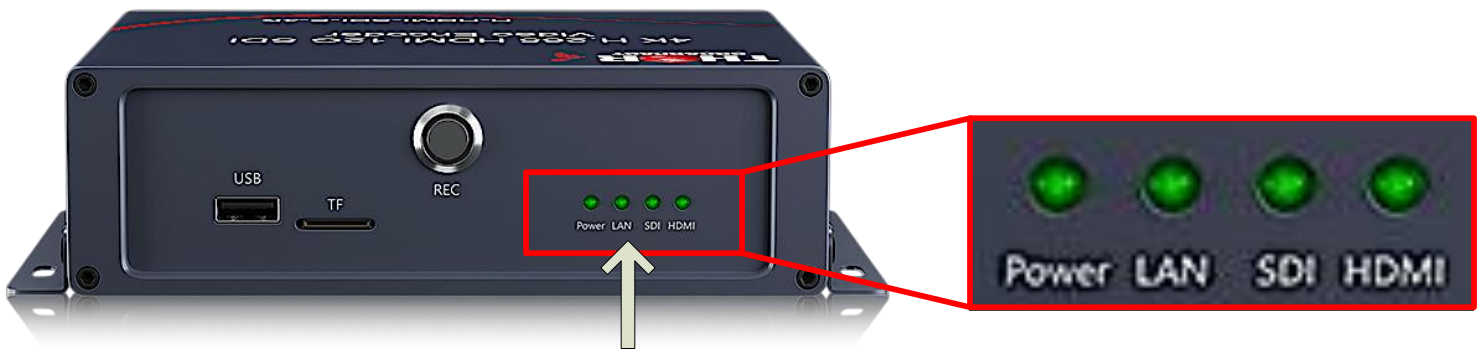


H-HDMI-SDI-E-4K

Quick Setup Guide


Step 1: Connect and Login

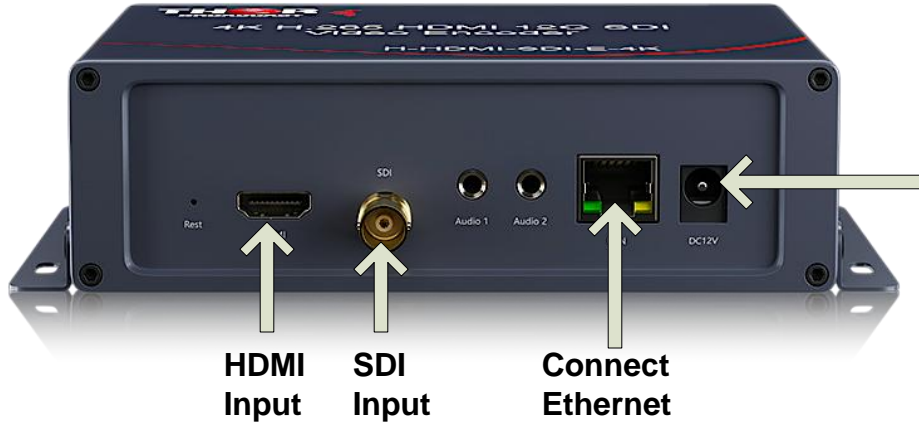

LED indicators on the front of the unit will light solid GREEN when Power, LAN, SDI and HDMI are each properly connected


- Connect the Ethernet port to your PC using an ethernet cable
- Open web browser and go to <http://192.168.1.168>
- Login/Password: admin/admin

Step 2: Select Stream Input

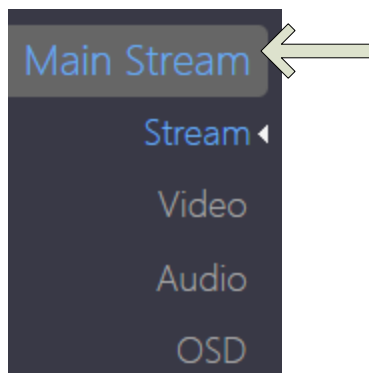

From the Main Menu, select "Main Stream" → "Stream"

2). Select "HDMI" or "SDI" as the input source for the stream

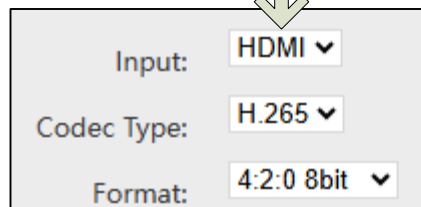

3). Click "Apply"



4). Repeat these steps for Main Menu option "Substream"

Step 3: Configure Stream Output

1). Select “Enable” for the stream types you want to use. Note: Only one stream per protocol is allowed simultaneously.

HTTP-TS URL:	<input type="text" value="/0.ts"/>	Enable ▾
HLS TS URL:	<input type="text" value="/0.m3u8"/>	Disable ▾
HLS MP4 URL:	<input type="text" value="/0_mp4.m3u8"/>	Disable ▾
MP4 URL:	<input type="text" value="/0.mp4"/>	Enable ▾
FLV URL:	<input type="text" value="/0.flv"/>	Enable ▾
RTSP URL:	<input type="text" value="/0"/>	Enable ▾
RTMP URL:	<input type="text" value="/0"/>	Disable ▾
RTMP(S)/RTSP PUSH URL:	<input type="text" value="rtmp://192.168.1.169/live/0"/>	Disable ▾



2). Click “Apply”



Step 4: Access Streams

Access your streams using the appropriate URL and syntax

EXAMPLES:

TS URL: <http://192.168.1.168/0.ts> <http://192.168.1.168:8086/0.ts>

HLS TS URL: <http://192.168.1.168/0.m3u8> <http://192.168.1.168:8086/0.m3u8>

HLS MP4 URL: http://192.168.1.168/0_mp4.m3u8

MP4 URL: <http://192.168.1.168/0.mp4>

FLV URL: <http://192.168.1.168/0.flv> <http://192.168.1.168:8086/0.flv>

RTSP URL: <rtsp://192.168.1.168/0> <rtsp://192.168.1.168:8554/0>

RTMP(S) PUSH URL: <rtmp://192.168.1.169/live/0>

Multicast IP URL: <udp://@238.0.0.1:1234>

Scan for more:

