


H-4HD-EMH

Quick Setup Guide


Step 1: Connections

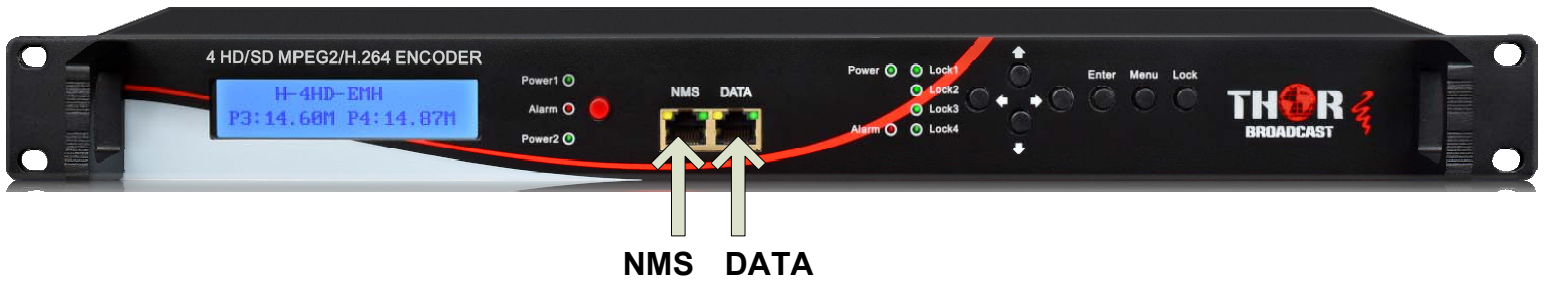


Step 2: Login

- Connect the NMS port to your PC using an ethernet cable
- Open web browser and go to <http://192.168.0.136>
- Login/Password: admin/admin

Step 3: Encoders



1). Select "Encoder 1" from the main menu



2). Select Channel



3). Input Lock indicator must be green


Repeat these steps as necessary for CH1/CH2 and "Encoder 2"

Step 3: TS Config



1). Select "TS Config" from the main menu


2). Select Encoder/Channel

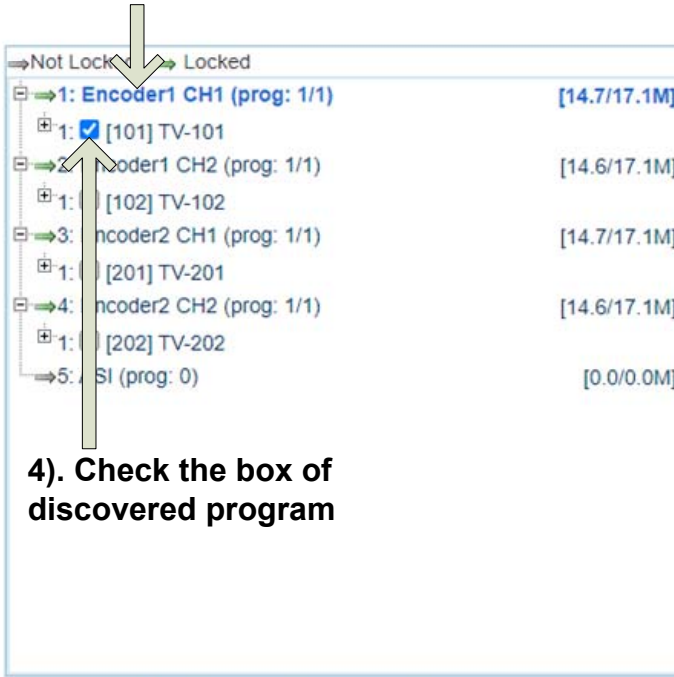


4). Check the box of discovered program

3). Click "Parse Program"

5). Click "→" button to assign selected program to output

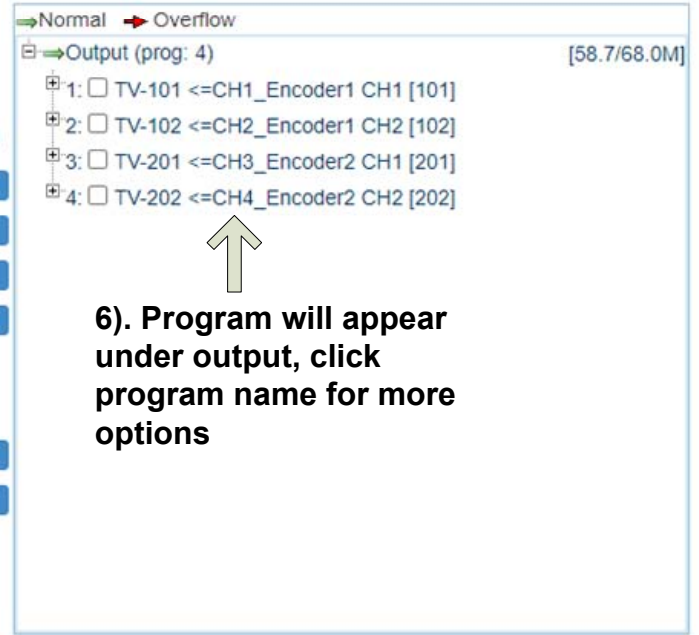

6). Program will appear under output, click program name for more options

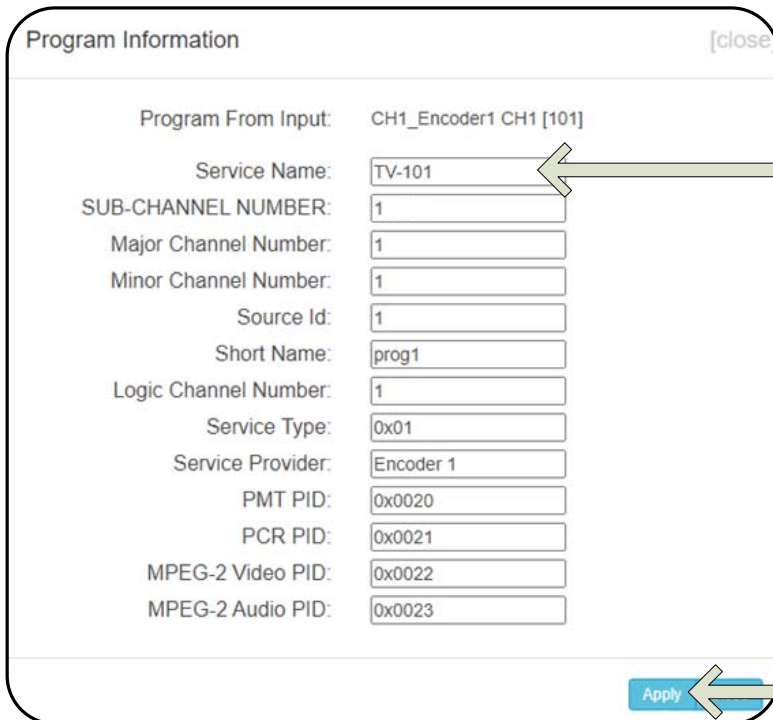

7). (Optional) Program name may be changed to preference

Click "Apply"

Step 4: Output Settings

- ▶ Encoder 1
- ▶ Encoder 2
- ▶ TS Config
- ▶ **Output Settings**

Select "Output Settings" from the main menu

Select top pencil icon to edit all

IP Stream(GE_DATA)

Channel Info.(Alarm/Active/Total): 0/4/5

#	IP Address	Port	Protocol	Pkt Length	Null PKT Filter	Program	Status	Bit(Act/Max)	
MPTS	224.2.2.2	2000	UDP	7	<input type="checkbox"/>			58.8/68.0 M	
SPTS 1	224.2.2.2	3000	UDP	7	<input type="checkbox"/>	TV-101		14.7/20.0 M	
SPTS 2	224.2.2.2	3002	UDP	7	<input type="checkbox"/>	TV-102		14.8/20.0 M	
SPTS 3	224.2.2.2	3004	UDP	7	<input type="checkbox"/>	TV-201		14.7/20.0 M	
SPTS 4	224.2.2.2	3006	UDP	7	<input type="checkbox"/>	TV-202		14.8/20.0 M	

Check box to Enable Channel

Status lights must be green

Select pencil icon on the same line to edit individually

SPTS 1 Config. [close]

Enable:

Output Bitrate: Mbps

IP Address:

Port:

Protocol:

Pkt Length:

Null PKT Filter:

Program:

Select program to output

Click "Apply"

Connect to the stream using the appropriate IP and Port Number

Example:
udp://@224.2.2.2:3000

IMPORTANT:

TO ACCESS STREAMS, CONNECT DEVICES TO THE DATA PORT USING AN ETHERNET CABLE

Step 5: Save Configuration

IMPORTANT:
**YOU MUST SAVE CONFIGURATION OR CHANGES
WILL BE LOST AFTER RESTARTING THE UNIT**

- ▶ Network
- ▶ Password
- ▶ **Configuration**
- ▶ Firmware
- ▶ Date | Time
- ▶ Log

Select "Configuration"
from the main menu

Save Restore Factory Set Backup Load

When you change the parameter, you should save configuration, otherwise the new configuration will be lost after reboot.

Save config

Click "Save config"

Scan for more info:



saving configuration, please wait...

Confirmation message
will appear briefly until
saving is complete.

H-4HD-EMH

Quick Setup Guide



<https://thorbroadcast.com>

800-521-8467

sales@thorfiber.com