


F-1GPS-TX/RX

Quick Setup Guide

Step 1: Connect Power

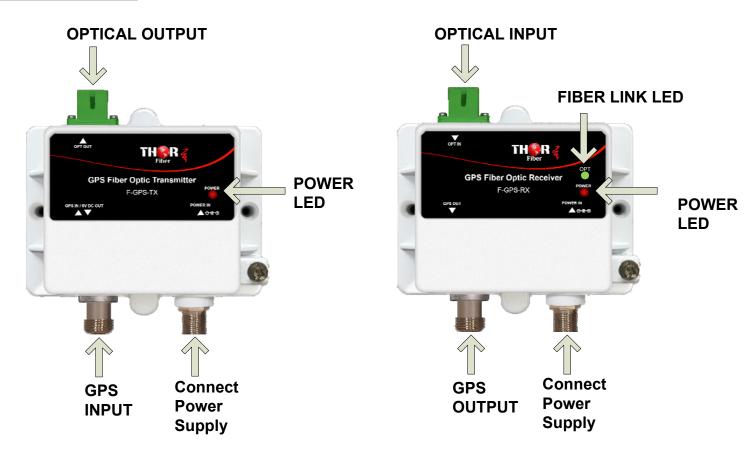

Connect the units to their included 12V power supplies. Tighten the nut so that the connecters are firmly attached. Power LEDs will indicate that power to the unit is properly connected.

Step 2: Connect Fiber



IMPORTANT:


of the Transmitter to the
Optical Input of the
Optical Input of the
Receiver using fiber optic
cable with SC/APC
connectors (Not Included)

The Fiber Link LED on the RECIEVER will indicate that the fiber optic connection is established.

Connect the Active GPS Antenna (Not Included) to the GPS INPUT port of the TRANSMITTER.

The VOLTAGE SWITCH on the TRANSMITTER, changes the voltage being sent to the antenna and can be set to 0V or 5V.



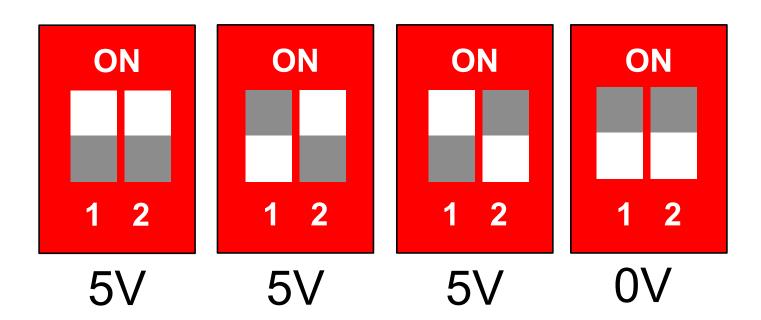

Connect the GPS OUTPUT of the RECEIVER to the receiving GPS device.

F-1GPS-TX/RX

Quick Setup Guide

