


F-1HD-1D-TVI-TX/RX

Quick Setup Guide

Step 1: Connect Power



Connect Included Power Supplies to Transmitter (T) and Receiver (R)

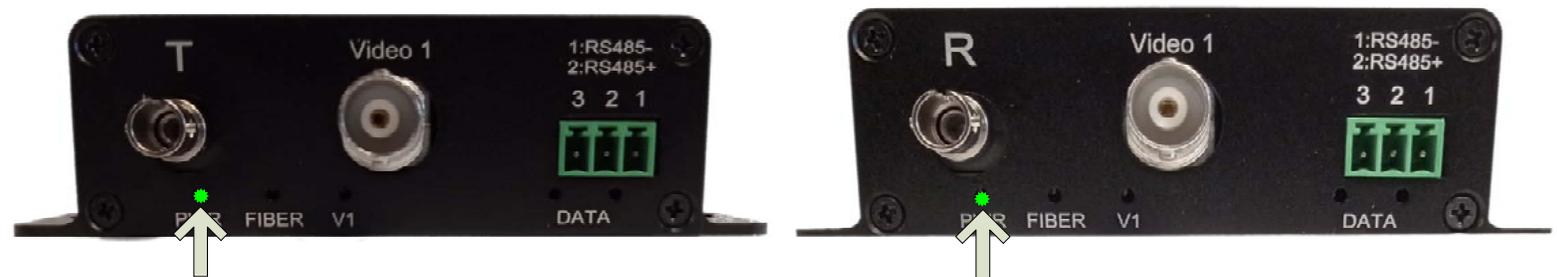


“PWR” LEDs on both T and R indicate power is properly connected

Step 2: Connect Fiber

Connect Transmitter to Receiver using Single Mode Fiber (Not Included)


Distance up to 120km

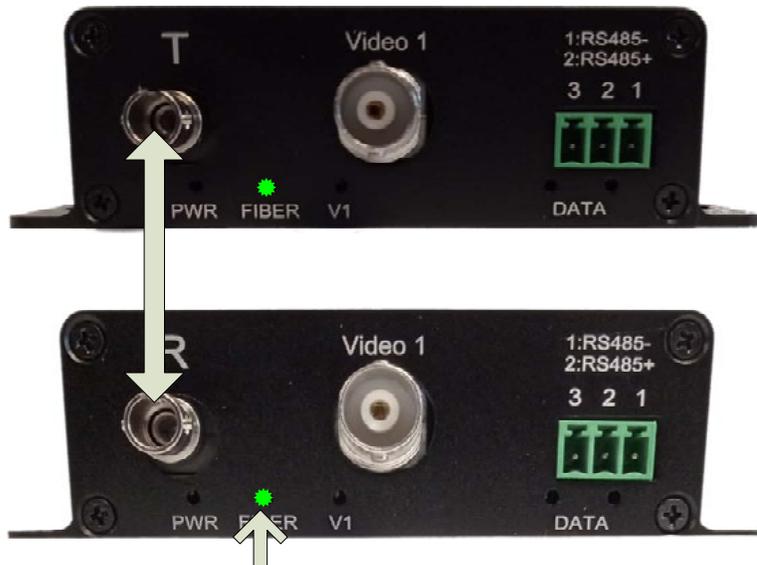

“FIBER” LEDs on both T and R indicate fiber is properly connected

Step 3: Connect Video


Connect video input to the Transmitter and output to the Receiver

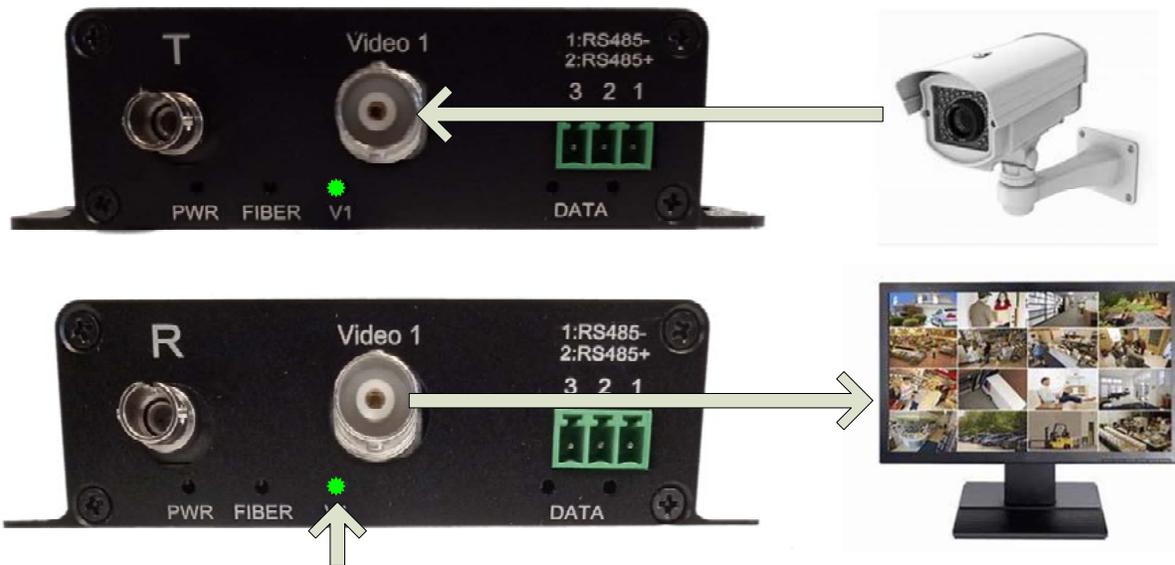

“V1” LEDs on both T and R indicate video is properly connected

Step 4: RS Data Connection

Connect Controller to the RS port on the Receiver, and device to be controlled to the RS port on the Transmitter

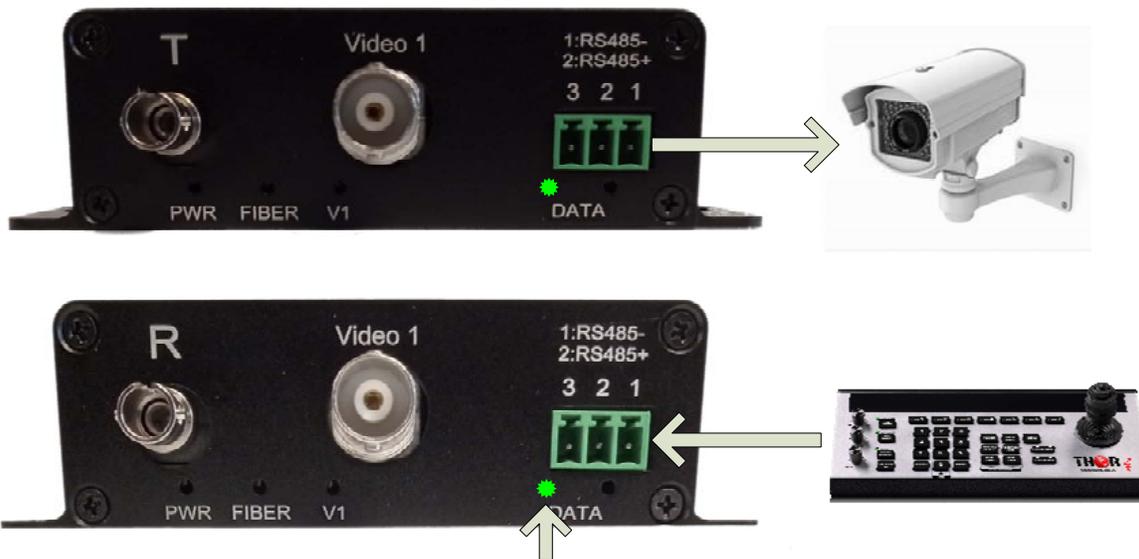

“DATA” LEDs on both T and R indicate RS data is properly connected

PLEASE NOTE:

RS data connection only applies to model F-1HD-TVI-1D-TX/RX

Similar models such as F-1HD-TVI-TX/RX do not have this feature.

Scan for more info:



F-1HD-1D-TVI-TX/RX

Quick Setup Guide



<https://thorbroadcast.com>

800-521-8467

sales@thorfiber.com