


F-2TEL-TX/RX

Quick Setup Guide


Step 1: Connect Power

- Connect the included power supplies to the TX (Transmitter FXS/PHONE) and RX (Receiver FXO/PBX).
- The PWR LED will light constant GREEN.

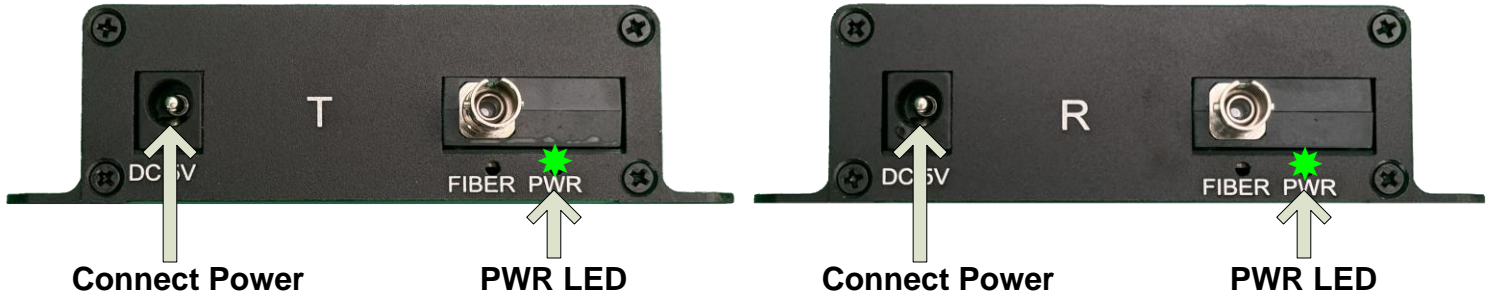


Step 2: Connect Fiber

- Connect Single mode fiber with ST/PC fiber connector
- The FIBER LED will turn constant GREEN on the TX and RX indicating optical link

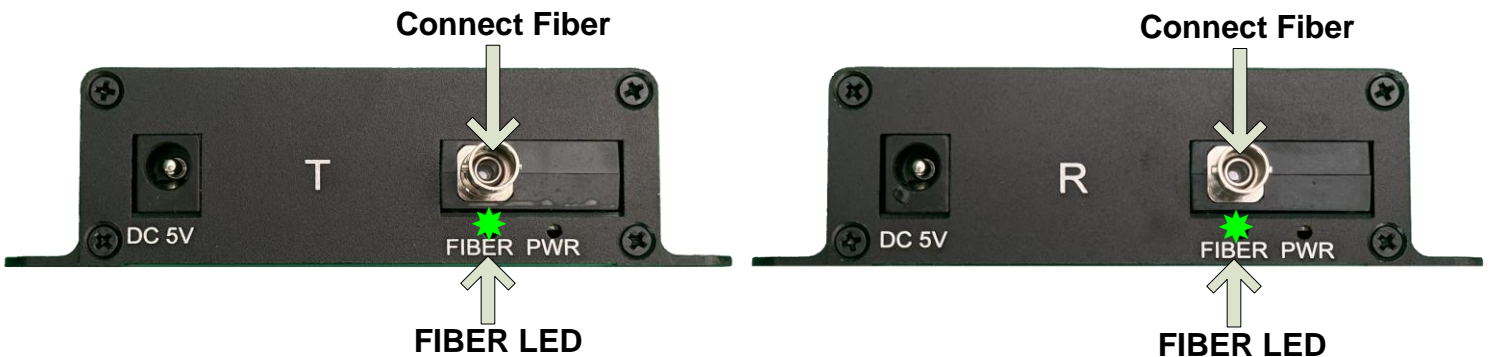

Step 3: Connect Phone Line

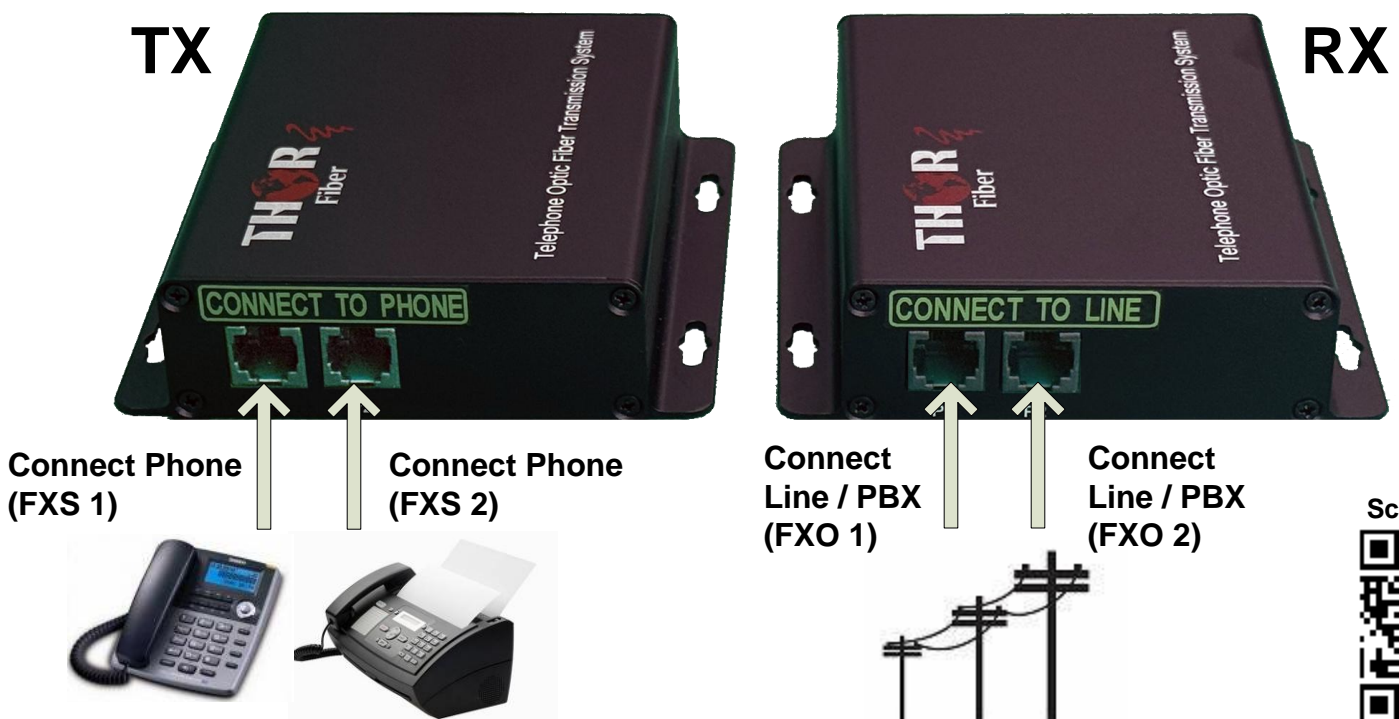

Scan for more:

