

H-HDMI-KVM-TXRX

Quick Setup Guide

Step 1: Connect Power



Connect included power supplies to both Transmitter (TX) and Receiver (RX)



"PWR" LEDs on both TX and RX indicate units are receiving power

Step 2: Connect Ethernet



RJ45


Using standard ethernet cable (not included) connect "RJ45 OUT" on TX to "RJ45 IN" on RX.



"LINK" LEDs on both TX and RX indicate network link

Step 3: Connect Computer and Peripherals


Connect Monitors to TX and RX "HDMI OUT" ports

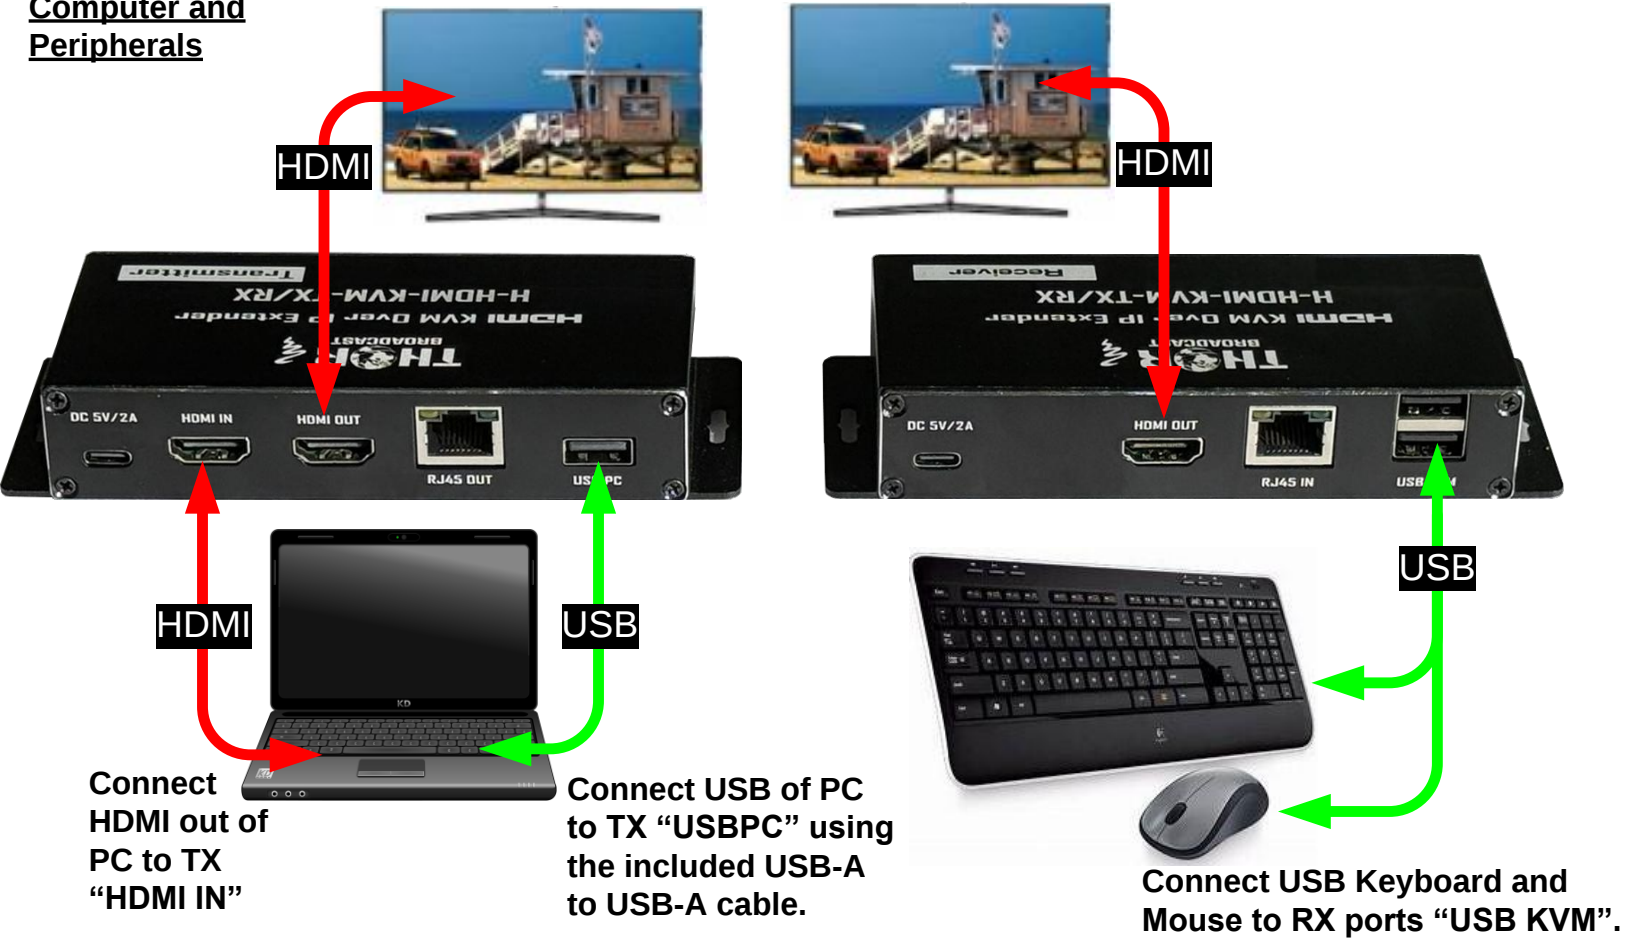


"STA" LEDs on both TX and RX indicate HDMI link

IMPORTANT:
USB KVM supports only mouse and keyboard.
Other USB devices are not supported.

Step 4: Connect Audio

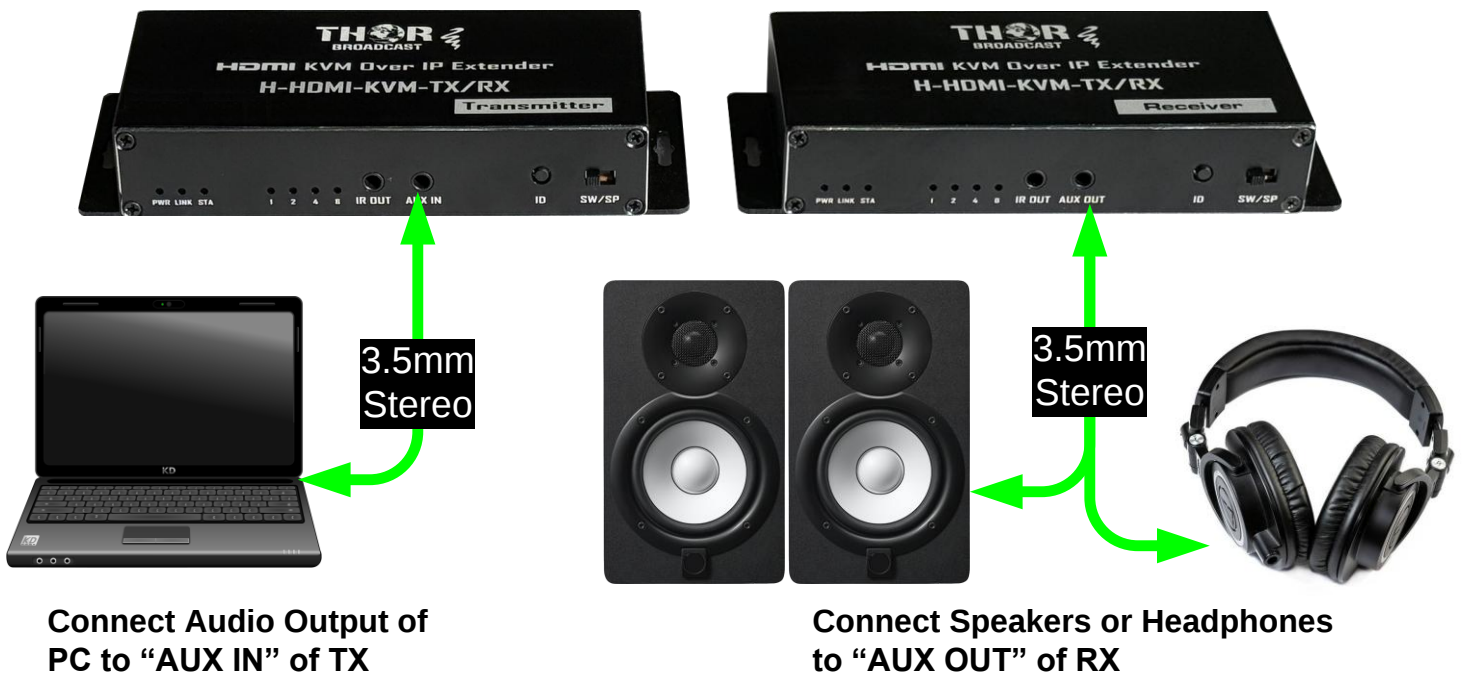


Step 5: Connect IR Sensors

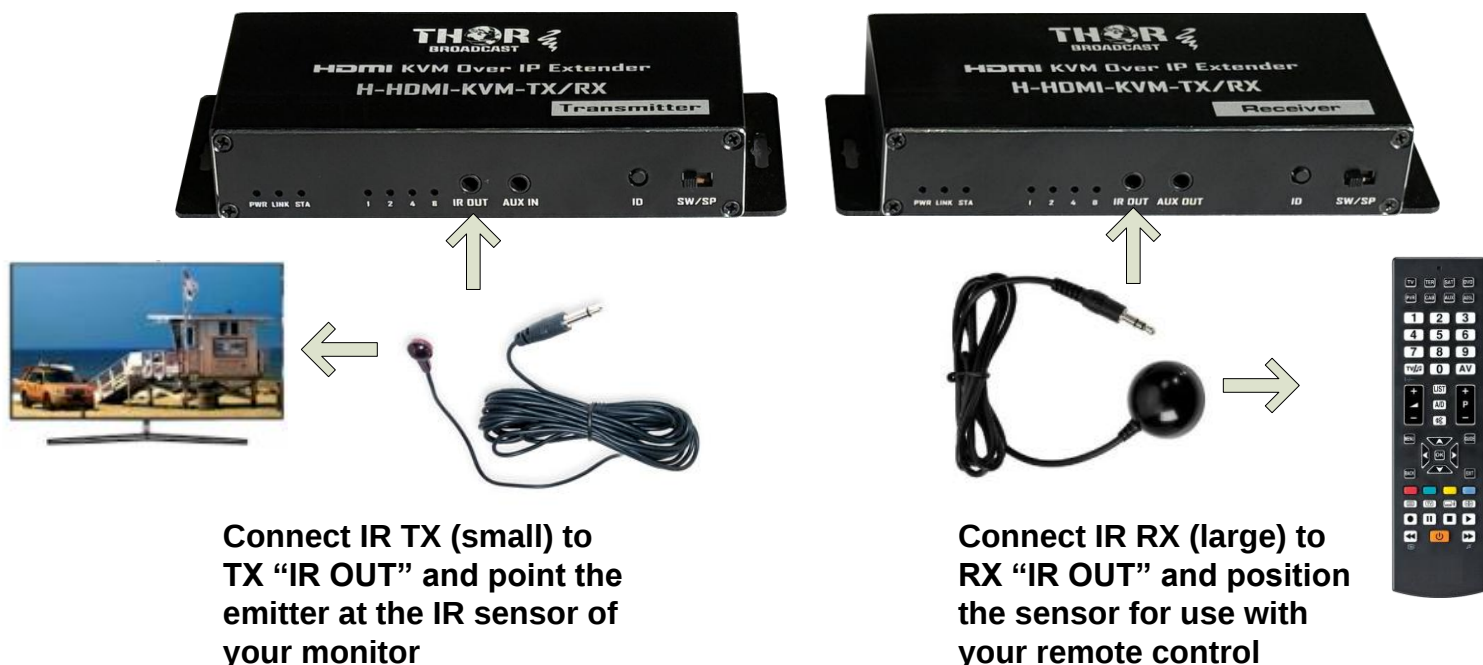

Connect IR TX (small) to TX "IR OUT" and point the emitter at the IR sensor of your monitor

Connect IR RX (large) to RX "IR OUT" and position the sensor for use with your remote control

Step 6: HDMI Splitter Mode (Optional)

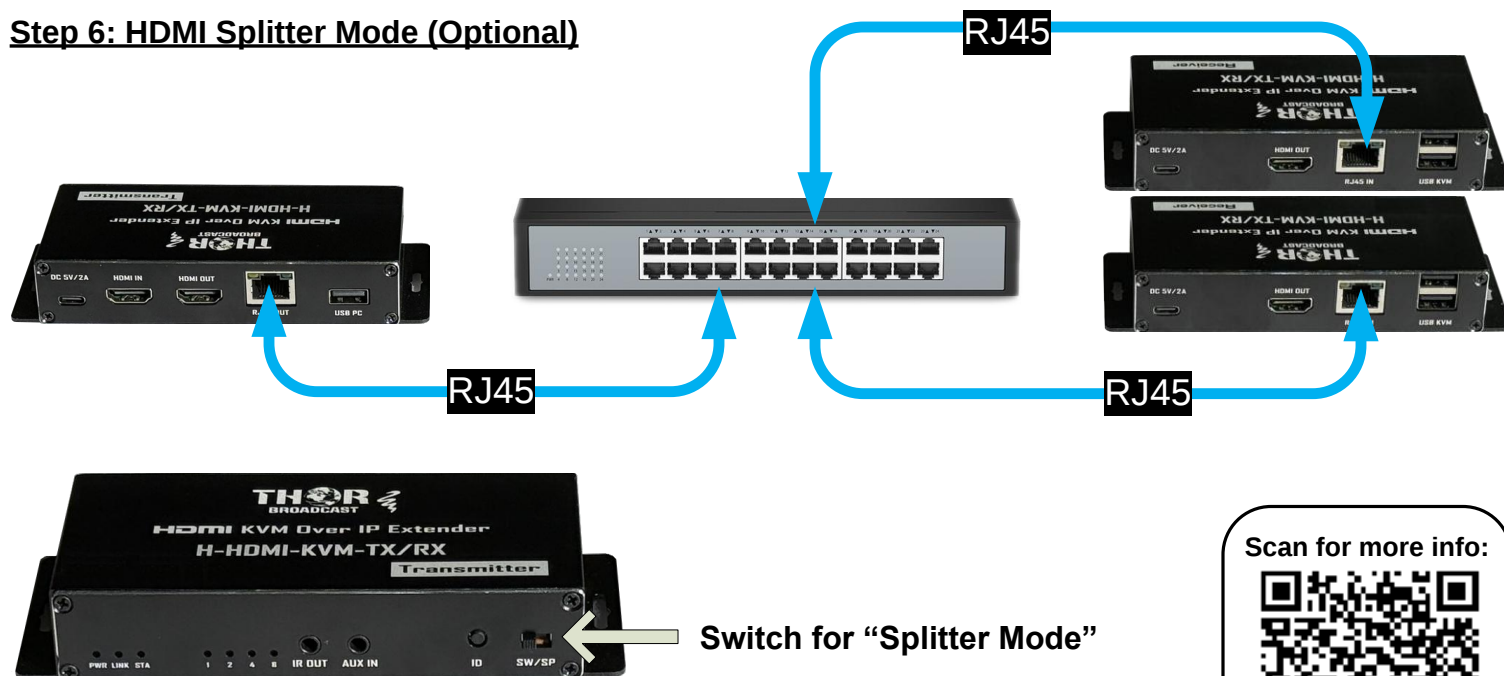

Switch for "Splitter Mode"

Scan for more info:



By selecting "Splitter Mode" multiple receiver units may receive HDMI from one transmitter when connected via network switch.

H-HDMI-KVM-TXRX

Quick Setup Guide



<https://thorbroadcast.com>

800-521-8467

sales@thorfiber.com