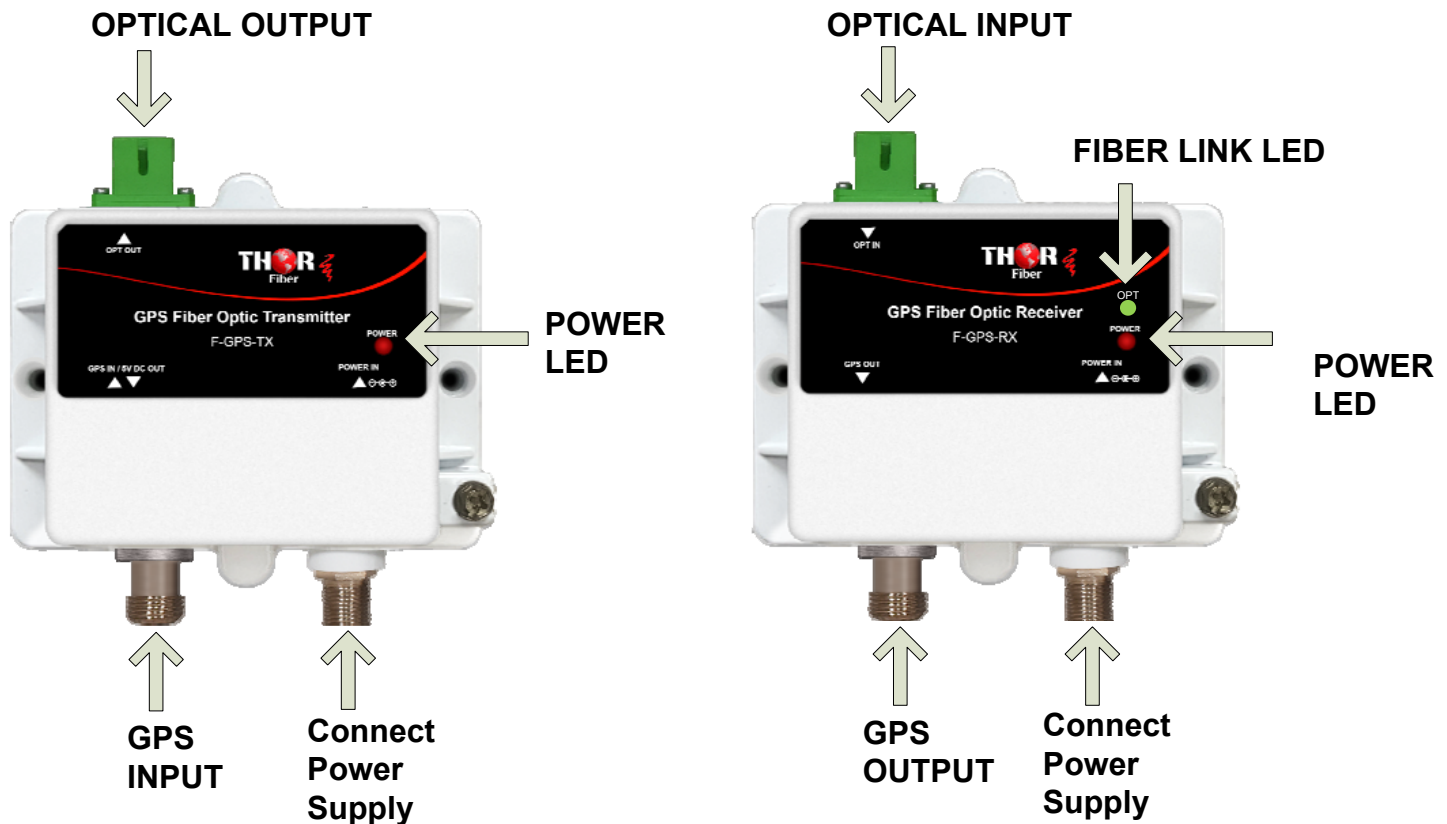
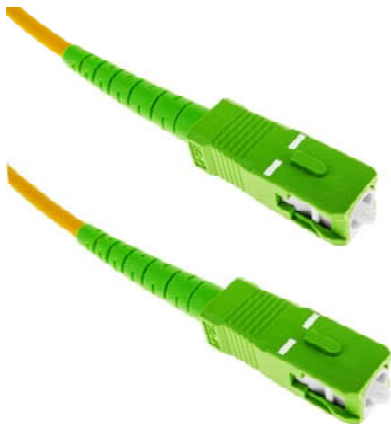


F-1GPS-TX/RX

Quick Setup Guide

Step 1: Connect Power

Connect the units to their included 12V power supplies. Tighten the nut so that the connectors are firmly attached. Power LEDs will indicate that power to the unit is properly connected.

Step 2: Connect Fiber**IMPORTANT:**

Connect the Optical Output of the Transmitter to the Optical Input of the Receiver using fiber optic cable with SC/APC connectors (Not Included)

The Fiber Link LED on the RECEIVER will indicate that the fiber optic connection is established.

Step 3: GPS Connections

Connect the Active GPS Antenna (Not Included) to the GPS INPUT port of the TRANSMITTER.

The VOLTAGE SWITCH on the TRANSMITTER, changes the voltage being sent to the antenna and can be set to 0V or 5V.



1 and 2 ON - 5VDC



5V

1 and 2 OFF - 0V DC



0V

Connect the GPS OUTPUT of the RECEIVER to the receiving GPS device.