https://thorbroadcast.com 800-521-8467 sales@thorfiber.com


F-2CC-TxRx

Quick Setup Guide

Step 1: Connect Power



Connect Included Power Supplies to Transmitter (TX) and Receiver (RX)

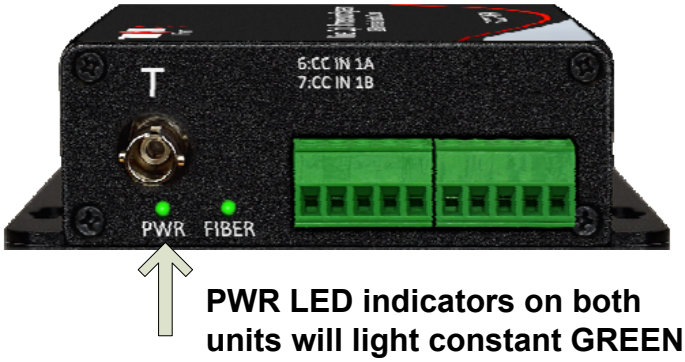


PWR LED indicators on both units will light constant GREEN

Step 2: Connect Fiber

Connect Transmitter to Receiver using Single Mode Fiber with ST/PC fiber connector (Not Included)

Distance up to 20Km



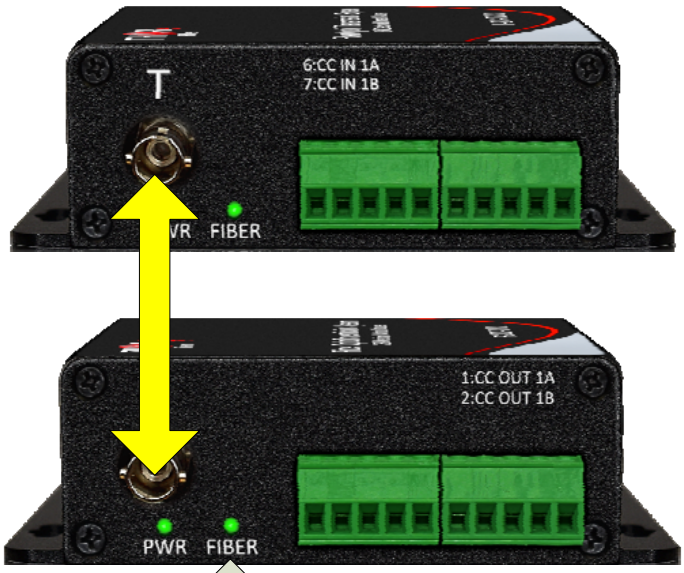


"FIBER" LEDs on both Tx and Rx indicate fiber is connected properly

Step 3: Contact Closures

TX	RX
6). In 1A	1).Out 1A
7). In 1B	2).Out 1B

Closure of TX ports 7&6 will send closure signal to RX ports 1&2

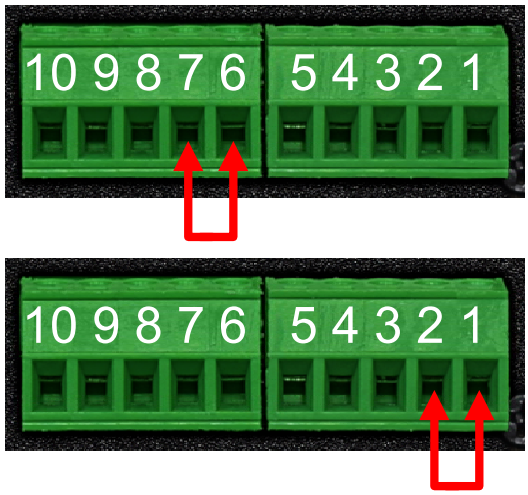

Scan for more info: