https://thorbroadcast.com 800-521-8467 sales@thorfiber.com


F-4CC-TxRx

Quick Setup Guide

Step 1: Connect Power



Connect Included Power Supplies to Transmitter (TX) and Receiver (RX)

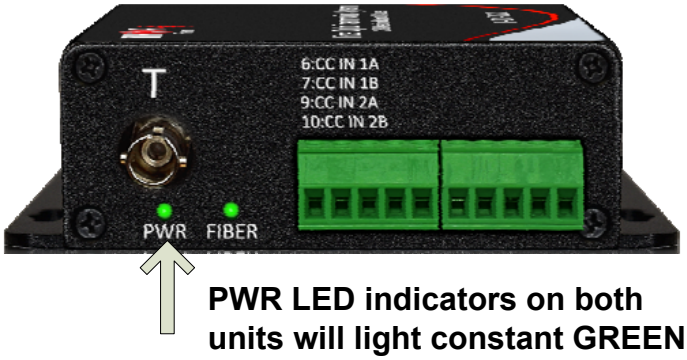


PWR LED indicators on both units will light constant GREEN

Step 2: Connect Fiber

Connect Transmitter to Receiver using Single Mode Fiber with ST/PC fiber connector (Not Included)

Distance up to 20Km



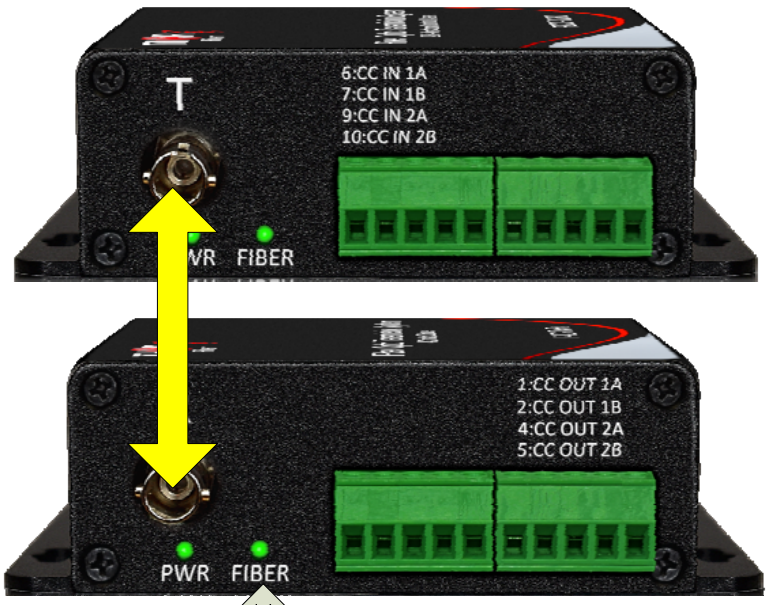


"FIBER" LEDs on both Tx and Rx indicate fiber is connected properly

Step 3: Contact Closures

	TX	RX
1).	In 1A	Out 1A
2).	In 1B	Out 1B
4).	In 2A	Out 2A
5).	In 2B	Out 2B
6).	In 3A	Out 3A
7).	In 3B	Out 3B
9).	In 4A	Out 4A
10).	In 4B	Out 4B

IN ports 1-10 on TX correspond to OUT ports 1-10 on RX

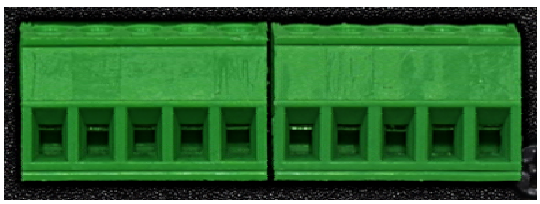

10 9 8 7 6 5 4 3 2 1

Scan for more info: