

**F-8SDI-3G-TX/RX-RM**

Quick Setup Guide

**Step 1: Connect Power**



Connect Included Power Cables to both Transmitter (TX) and Receiver (RX)



“PWR” LED on both TX and RX indicates that unit is receiving power

**Step 2: Connect Fiber**



Connect Transmitter to Receiver using Single Mode Fiber with ST/PC connector (Not Included)  
Distance up to 10km




“LINK” LED will light GREEN on both TX and RX when fiber is properly connected.  
RX LINK LED will light RED when fiber is not connected.

### Step 3: Connect Inputs/Outputs


Connect SDI video inputs to the Transmitter and outputs from the Receiver to the monitors

Transmitter Inputs SDI 1-8 correspond to Receiver Outputs SDI 1-8

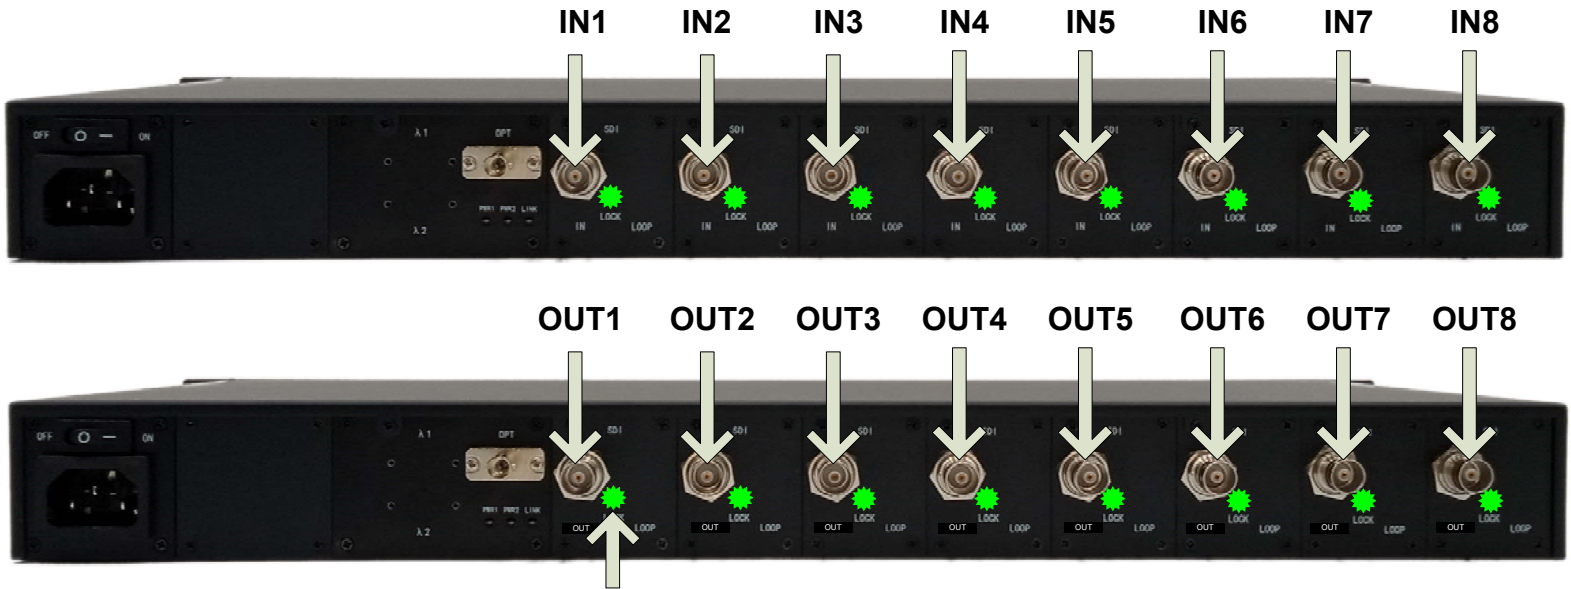

“LOCK” LEDs on both TX and RX will light GREEN indicating video is properly connected

### Step 4: Signal Flow (Example)

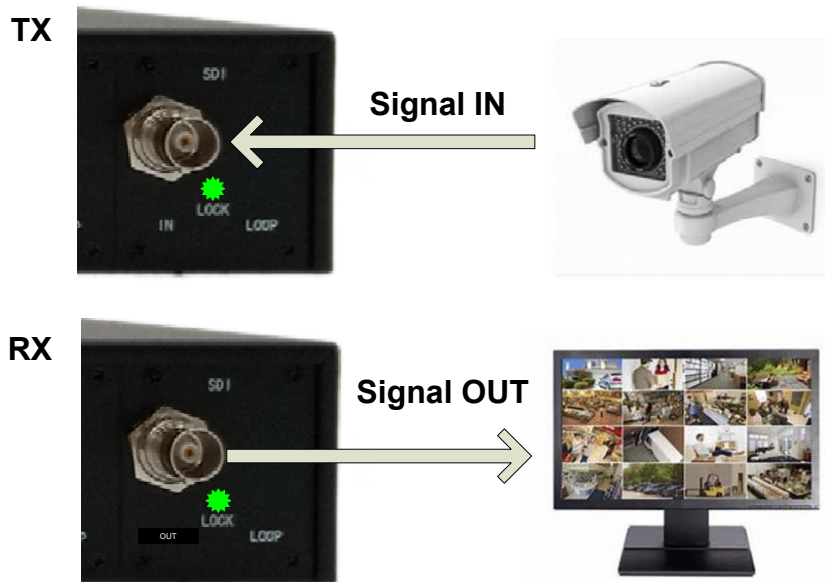

Scan for More:

