

F-1TEL-Tx/RX

Quick Setup Guide

Step 1: Connect Power

- Connect the included power supplies to the TX (Transmitter) and RX (Receiver) .
- The PWR LED will turn constant GREEN.
- The FIBER LED will blink GREEN on the TX and RX.



Connect Power



Connect Power

Step 2: Connect Fiber

- Connect Single mode fiber with ST/PC fiber connector
- The FIBER LED will turn constant GREEN on the TX and RX – will indicate the correct optical link light




Connect Fiber




Connect Fiber

Step 3: Connect Phone Line

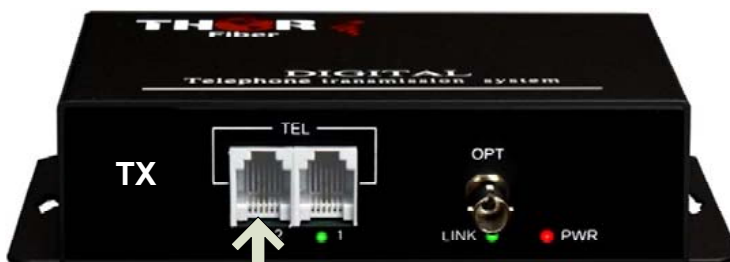

Connect Phone

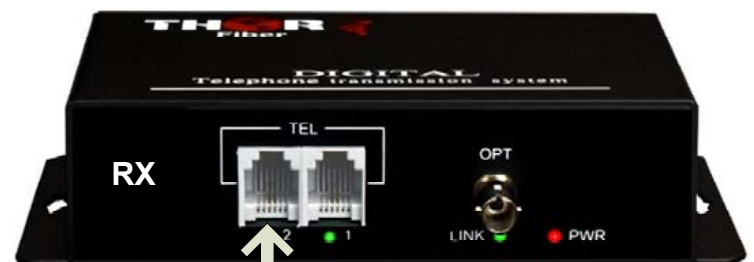

Connect Line

