

F-2TEL-Tx/RX

Quick Setup Guide

Step 1: Connect Power

- Connect the included power supplies to the TX (Transmitter FXS/PHONE) and RX (Receiver FXO/PBX).
- The PWR LED will turn constant GREEN.
- The FIBER LED will blink GREEN on the TX and RX.



Connect Power



Connect Power

Step 2: Connect Fiber

- Connect Single mode fiber with ST/PC fiber connector
- The FIBER LED will turn constant GREEN on the TX and RX indicating optical link




Connect Fiber




Connect Fiber

Step 3: Connect Phone Line

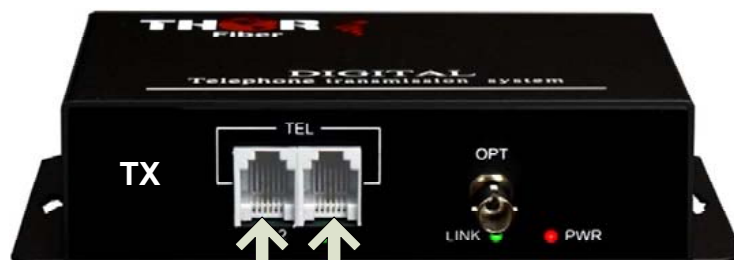

Connect Phone
(FXS 1)

Connect Phone
(FXS 2)

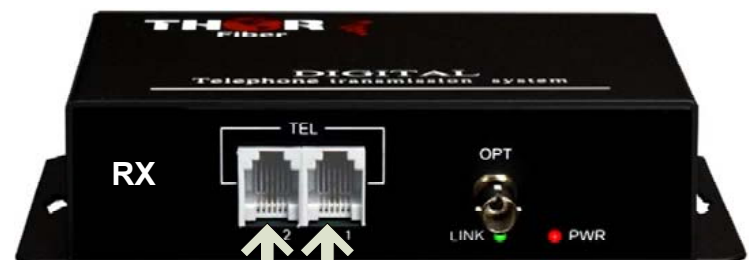

Connect
Line / PBX
(FXO 1)

Connect
Line / PBX
(FXO 2)

Scan for more:

