

F-4TEL-Tx/RX

Quick Setup Guide

Step 1: Connect Power

- Connect the included power supplies to the TX (Transmitter/FXS) and RX (Receiver/FXO) .
- The PWR LED will turn constant GREEN.
- The FIBER LED will blink GREEN on the TX and RX.




Connect Power




Connect Power

Step 2: Connect Fiber

- Connect Single mode fiber with ST/PC fiber connector
- The FIBER LED will turn constant GREEN on the TX and RX indicating optical link

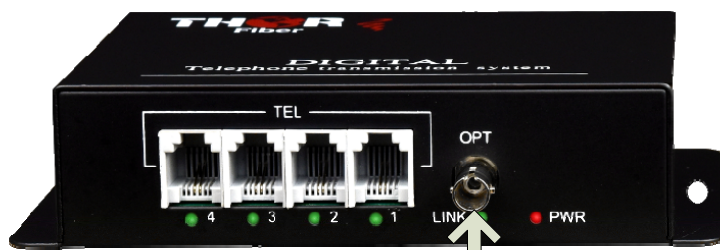


Connect Fiber

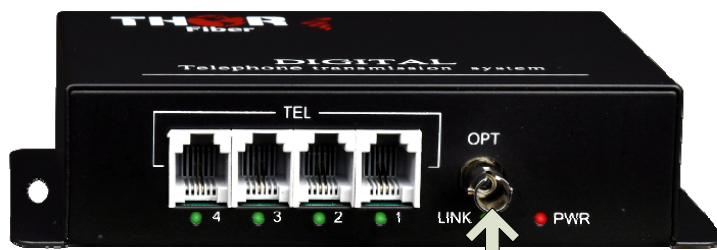


Connect Fiber

Step 3: Connect Phone Line

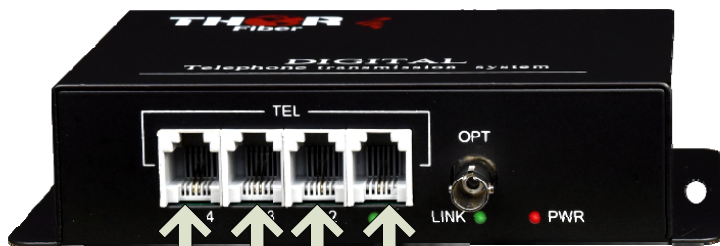

Connect
Phones

(FXS 1-4)

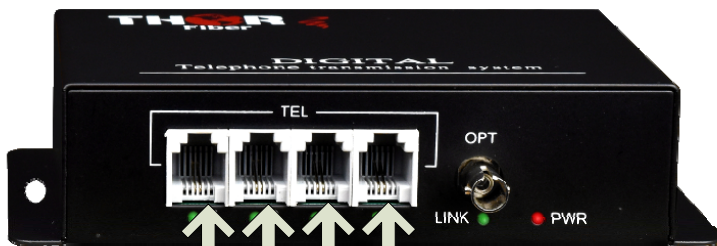

Connect
Lines/PBX

(FXO 1-4)



Scan for more:

