

Data Sheet: H-8ASI-MUX

The **H-8ASI-MUX** is an ASI transport stream multiplexer for up to 8 inputs. The unit takes the 8 ASI inputs and multiplexes them onto a single ASI output. The output is a DVB-ASI Multi

Program Transport Stream (MPTS). The H-8ASI-MUX has an easy to read LCD display for easy configuration and status. The unit also offers an Ethernet port for remote management and monitoring. The H-8ASI-MUX has the ability to insert Electronic Programing Guide (EPG) information and offers Conditional Access (CA). Featuring auto generation of PSI/SI information, re-mapping of PID, service filtering, and editing of PSI/SI information. The H-8ASI-MUX is an ideal solution for digital TV Broadcasters who need to multiplex multiple transport streams onto a single DVB-ASI output.




Typical H-8ASI-MUX Application

Up to 8 ASI Multiplexer Application drawing

Up to 8 MPEG2 Encoders or Different ASI sources



8 x ASI Source

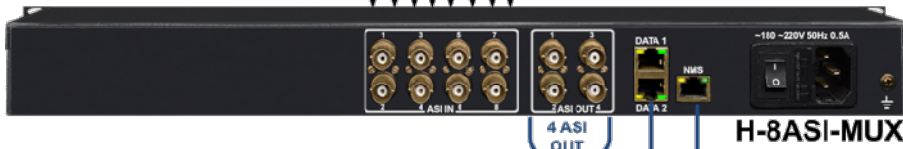

H-8ASI-MUX

4 Multiplexed
ASI Outputs

ASI Fiber Optic Transmitter

F-4ASI-TX

Fiber Up to 120 km

ASI Fiber Optic Receiver

F-4ASI-RX

4 ASI OUT
4 Multiplexed
ASI Outputs



NMS – Network
Management
System

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Ethernet

Technical Specifications

Input Interfaces:

ASI	8 ASI Inputs Max 216 Mbps /Ch
Re-Multiplexing	MPEG-2 Input TS Re-Mux
	PID Remapping
	PCR Correction
	Auto Generation of PSI/SI Tables

Output Interfaces:

ASI	1 Multiplexed Output 1x2 mirrored
Ethernet Port	10/100 Mbps NMS port

Physical Characteristics

Operating Temp:	0 – 45 (°C)
Storage Temp:	-20 – 80 (°C)
Operating Humidity:	0 – 90 (%)
Storage Humidity:	0 – 90 (%)
Power Requirements:	110/240V Auto Sense
Dimensions:	480mmX225mmX44mm